

P5-8DW

SPEC SHEET



PREMIUM PERFORMANCE



DRYWALL
SANDING



JOINT
COMPOUND



WOOD




PLASTER



FILLER



PAINT

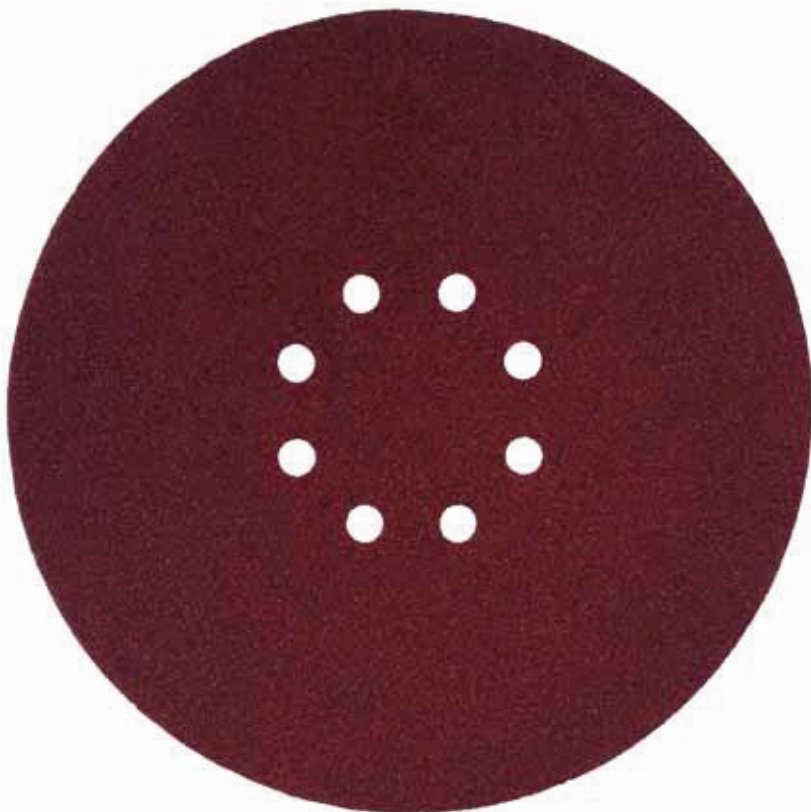

■ IDEALLY SUITED ■ OCCASIONAL USE

MATERIAL

EXPANDING FILLER	
FIBRE GLASS	
HARD WOOD	
JOINT COMPOUND	
METAL	
PAINT	
PLASTER	
PLASTIC	
SOFT WOOD	
SURFACE FILLER	
VARNISH	

DESCRIPTION: Suitable for use on Giraffe type long reach sanders and hand held sanders, including: Flex, Scheppach, Vitrex, Festool, Evolution, Titan, Menzer and Fox.

FEATURES: Hook and loop fixing, 8-Hole punched extraction, Durable Aluminium-Oxide grit.

MACHINE SUITABILITY: Most brands of Giraffe sander & 225mm hand held dry wall sander.

STANDARDS:

- EN13743: European standard that regulates the safety requirements for coated abrasive products. (sanding sheets and discs.)

USER TIPS:

- Always use the appropriate PPE
- Keep the sander moving at all times for a smooth and even finish
- Sanding creates a large amount of airborne dust. It is strongly advised that a dust extraction unit is used, with a minimum specification of 'M-Class'.

PACKAGING DETAILS:

Full colour corrugated cardboard box.

PRODUCT DETAILS:

Part No.	Grit	Pack Qty.
AP10901	P40	10
AP10903	P80	10
AP10904	P100	10
AP10905	P120	10
AP10906	P180	10
AP10908	P220	10



E sales@premierdiamondproducts.co.uk

T +44 (0) 1227 711 555



www.premierdiamondproducts.co.uk



CUTTING EDGE TECHNOLOGY