


RECIPROCATING SAW BLADES



SPEC SHEET

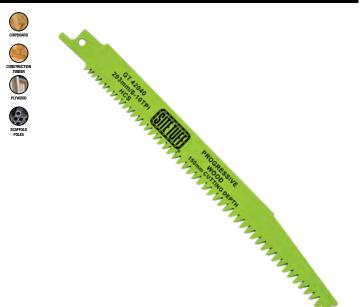

IDEALLY SUITED UNSUITABLE OCCASIONAL USE

ALUMINIUM	
CAST IRON	
CHIPBOARD	
CONSTRUCTION TIMBER	
EPOXY	
GLASS FIBRE ENFORCED PLASTIC (GRP)	
LIGHTWEIGHT BUILDING BLOCKS	
MEDIUM DENSITY FIBRE BOARD	
NAIL EMBEDDED WOOD	
NON FERROUS METALS (COPPER, ZINC, LEAD)	
PLASTIC	
PLYWOOD	
SCAFFOLD BOARD - CLEAN	
SCAFFOLD BOARD - METAL EMBEDDED (INC. END STRAPS)	
SCAFFOLD TUBE - GALVANISED (ALL THICKNESSES)	
STEEL SECTION (PIPE, ANGLE, BOX)	
TREE PRUNING / GREEN WOOD	
WOOD - CLEAN HARDWOOD	
WOOD - CLEAN SOFTWOOD	

DESCRIPTION:

The progressive pitch and variable TPI of the blade provides clean, fast cutting of construction timber and softwoods, as well as chipboard, MDF and plywood. The pointed tip allows the blade to be plunged into the material with ease. (Maximum cutting depth 150mm)

PACKAGING DETAILS:

Full colour cardboard box.



Widely Recycled

PRODUCT DETAILS:

PART NO.	SPEC	SIMILAR TO	APPLICATION	OVERALL LENGTH & TPI	BLADE MATERIALS & THICKNESS
GT42040	ST-RB S2345X	S2345X	Progressive Wood Cutting	203mm/6-10TPI	HCS/1.2mm





