


SCAFFOLDING/ HEAVY DUTY METAL

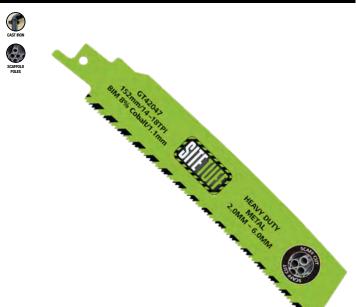

DESCRIPTION:

The SCAFFCUT's 25mm wide concaved blade delivers fast and precise cuts through galvanised steel scaffold tube with ease. With an 8% Cobalt content, the cutting edge is more durable, heat resistant and offers longer life, giving an excellent cutting performance through steel products with a thickness between 2 and 6mm.

FEATURES:

Concaved Cutting Edge, for constant contact with the material, 8% Cobalt content for greater heat resistance and longer life, S-Shank fitting

MACHINE SUITABILITY:

All S-shank Reciprocating Saws, inc Makita, Bosch, Milwaukee & Dewalt

USER TIPS:

- · Always wear the appropriate PPE
- Ensure you select the correct blade for your task
- Disconnect the power/ remove the battery prior to fitting or removing a blade
- Adjust the shoe to the desired cutting depth and ensure that it is firmly placed against the material before cutting
- Always use two hands to hold and support the machine whilst in use
- Allow the blade to make the cut Excessive downward pressure will slow the cutting speed and increase the risk of the blade overheating, prematurely blunting the blade.

IDEALLY SUITED UNSUITABLE OCCASIONAL USE

ALUMINIUM					
CAST IRON					
CHIPBOARD					
CONSTRUCTION TIMBER					
EPOXY					
GLASS FIBRE ENFORCED PLASTIC (GRP)					
LIGHTWEIGHT BUILDING BLOCKS					
MEDIUM DENSITY FIBRE BOARD					
NAIL EMBEDDED WOOD					
NON FERROUS METALS (COPPER, ZINC, LEAD)					
PLASTIC					
PLYWOOD					
SCAFFOLD BOARD - CLEAN					
SCAFFOLD BOARD - METAL EMBEDDED (INC. END STRAPS)					
SCAFFOLD TUBE - GALVANISED (ALL THICKNESSES)					
STEEL SECTION (PIPE, ANGLE, BOX)					
TREE PRUNING / GREEN WOOD					
WOOD - CLEAN HARDWOOD					
WOOD - CLEAN SOFTWOOD					

PRODUCT DETAILS:

PART NO.	SPEC	SIMILAR TO	APPLICATION	OVERALL LENGTH & TPI	BLADE MATERIALS & THICKNESS
GT42047	ST-RB S927BEF	S927BEF	Scaffold tubes	152mm/14- 18TPI	BIM 8% Co- balt/ 1.1mm

PACKAGING DETAILS:

Full colour cardboard box.











